



### DB25 Equivalent

|    |     |        |    |
|----|-----|--------|----|
| 18 | GND | ACK#   | 10 |
| 19 | GND | BUSY   | 11 |
| 20 | GND | PE     | 12 |
| 21 | GND | SELECT | 13 |
| 22 | GND | AFEED# | 14 |
| 23 | GND | ERROR# | 15 |
| 24 | GND | PINIT# | 16 |
| 25 | GND | SLIN#  | 17 |


### IDC26 Connector

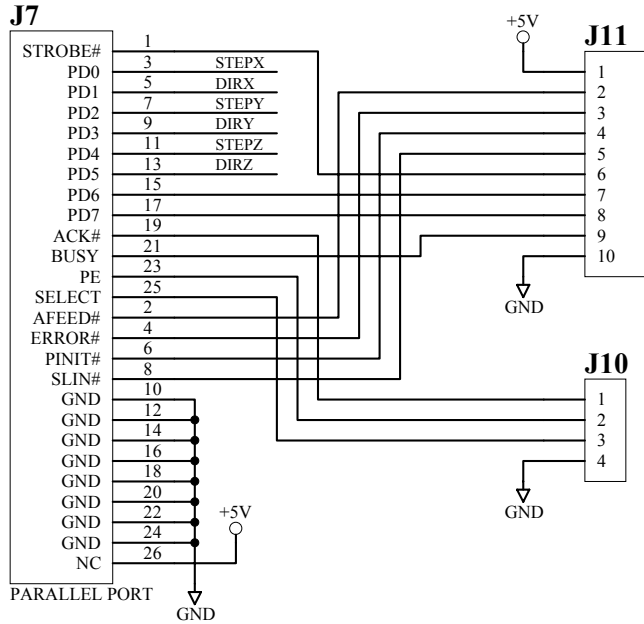

### 10 Pin Housing Molex# 22-01-2107

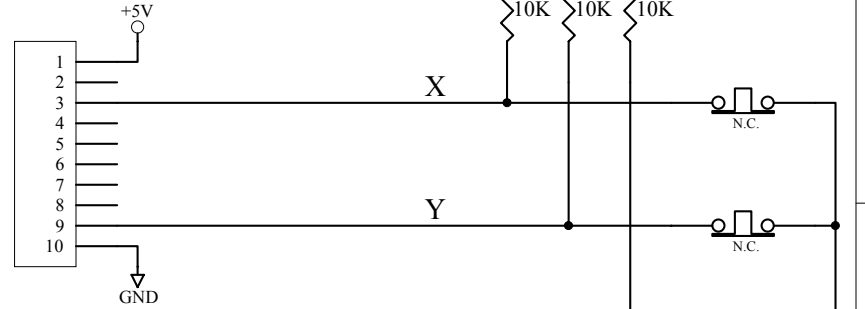

### 4 Pin Housing Molex# 22-01-2047

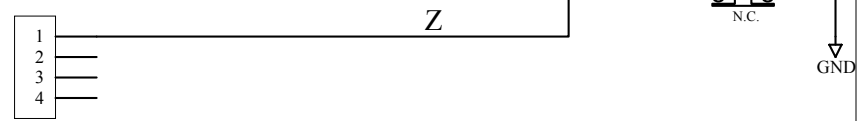

crimp terminals are Molex# 08-50-0114

User Supplied Connectors, Switches, etc.

### Xylotex 3 Axis Board

In this example, three normally closed (NC) switches are wired to inputs for X, Y & Z. During normal operation (with the switches closed/not activated) the inputs will read 0 (LOW). When a switch has been pressed, the input will then read 1 (HIGH). Software must be set up to use switches as wired. Other inputs that could be used are Pin2 and Pin 3 on J10 (the other pins are generally outputs)

In this example  
 The X input is equivalent to DB25 pin # 15  
 The Y input is equivalent to DB25 pin # 11  
 The Z input is equivalent to DB25 pin # 10

|       |                       |           |
|-------|-----------------------|-----------|
| Title |                       |           |
| Size  | Number                | Revision  |
| A     |                       |           |
| Date: | 6-Mar-2003            | Sheet of  |
| File: | C:\Designs\va3977.ddb | Drawn By: |